
# **DURACELL®**

### MN1203


Size: MN1203 (3LR12)

## Alkaline-Manganese Dioxide Battery

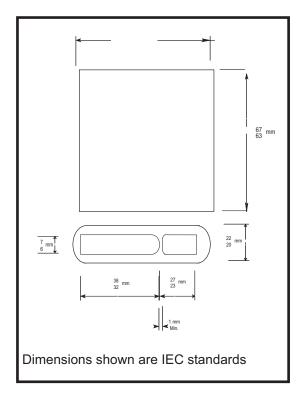


Nominal Voltage:	4.5 V
Nominal Internal Impedance:	816 m-ohm @ 1kHz
Average Weight:	154 gm (5.4 oz.)
Volume:	83 cm <sup>3</sup> (5.08 in. <sup>3</sup> )
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
IEC:	3LR12

### Typical Discharge at 220 ohm at various Temperatures

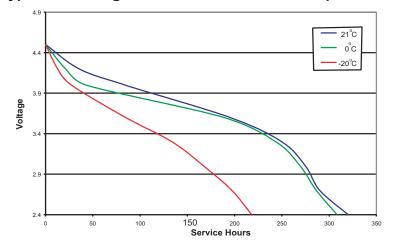

#### Typical Discharge at 20 ohm at various Temperatures

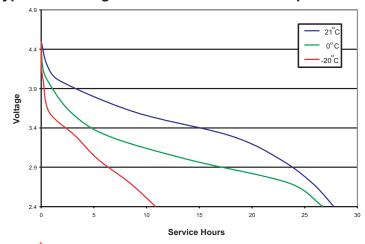



Berkshire Corporate Park Bethel, CT 06801 U.S.A. Telephone: Toll-free 1-800-544-5454 Internet: www.duracell.com

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.