
# **DURACELL®**


### **Alkaline-Manganese Dioxide Battery**

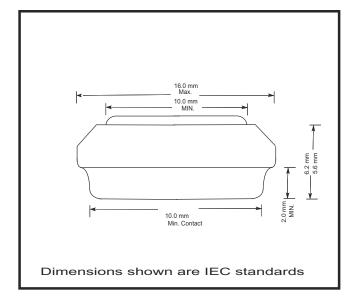


Nominal Voltage:	1.5 V
Average Weight:	3.0 gm (0.1 oz.)
Volume:	0.92cm <sup>3</sup> (0.056 in <sup>3</sup> .)
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
IEC:	LR9

Size: LR9

### Typical Discharge Characteristics at 21°C (70°F)

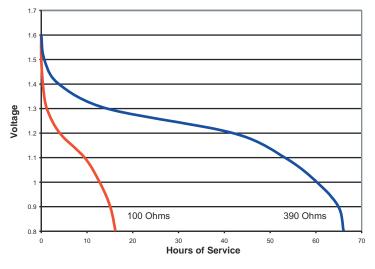

#### Typical Discharge Characteristics at 21°C (70°F)

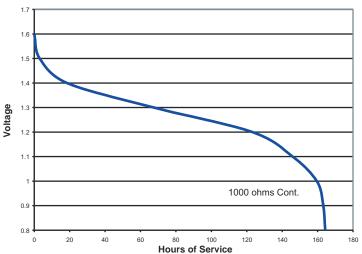

## DURACELL

Berkshire Corporate Park Bethel, CT 06801 U.S.A.

Telephone: Toll-free 1-800-544-5454

Internet: www.duracell.com

<sup>\*</sup> Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.