

## CODICE/CODE: ZLS120120


Batteria sigillata AGM DEEP-CYCLE (uso ciclico) al silicone  
Silicon DEEP-CYCLE AGM maintenance free battery



		Volt	12V
Capacity/capacità 25°C		20h (1.85V/cell)	28Ah
		5h (1.80V/cell)	23Ah
		3h (1.75V/cell)	21Ah
		2h (1.75V/cell)	20Ah
Capacity affected by Temperature/Effetti della temperature sulla capacità		40°C	102%
		25°C	100%
		10°C	90%
		0°C	80%
		-10°C	70%
Self-Discharge 25°C Capacity / Autoscarica a 25°C		after 3 month storage	90%
		after 6 month storage	80%
		after 12 month storage	70%
Charge cycle/ Ciclo di carica	IU + h	"In" max.5Amp; "V1" 2.43V/cell	
	IUIa		

Battery Dimensions/ Dimensioni batteria	L/L	181mm
	W/P	77mm
	H/A	170mm
	Tot- H/A	172mm
Weight/peso		7.1Kg
Plt. Qt. / Qt per pallet		128
Terminal/terminal		M5
Case/contenitore		ABS
Internal impedance/ resistenza interna		<10mΩ

### Charge cycle for sealed batteries (GEL/AGM): IU + holding

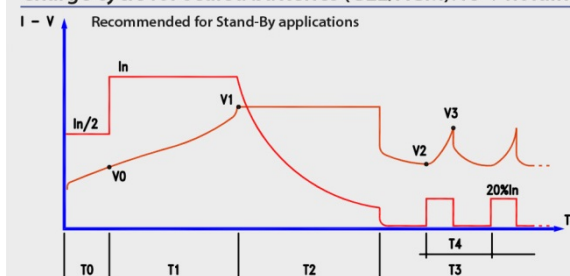

- In = PROGRAMMED CAPACITY/10
- V0 = 1,90 V/CELL
- V1 = PROGRAMMED VALUE
- V2 = 2.10 V/CELL
- V3 = 2.30 V/CELL
- T0 = MAX. 1 HR
- T1 = MAX. 12 HRS
- T2 = T1 (MIN. 2-MAX. 5 HRS)
- T3 = UNLIMITED

